

[NAME OF DOCUMENT] APPLICATION FOR PATENT

[REFERENCE NUMBER] 1043566

[DATE FILED] April 27, 2004

[DESTINATION] To Commissioner, Patent Office;  
Mr. Yasuo Imai

[INTERNATIONAL PATENT CLASSIFICATION] B01D 53/94

[INVENTOR]  
[Address or Residence] c/o TOYOTA JIDOSHA KABUSHIKI KAISHA,  
1, Toyotacho, Toyota-shi, Aichi  
[Name] Masahide Miura

[APPLICANT]  
[Identification Number] 000003207  
[Name of Applicant] TOYOTA JIDOSHA KABUSHIKI KAISHA

[PATENT ATTORNEY]  
[Identification Number] 100099759  
[Patent Attorney]  
[Name of Patent Attorney] Atsushi Aoki  
[Phone Number] 03-5470-1900

[APPOINTED PATENT ATTORNEY]  
[Identification Number] 100092624  
[Patent Attorney]  
[Name of Patent Attorney] Junichi Tsuruta

[APPOINTED PATENT ATTORNEY]  
[Identification Number] 100102819  
[Patent Attorney]  
[Name of Patent Attorney] Tetsuro Shimada

[APPOINTED PATENT ATTORNEY]  
[Identification Number] 100123593  
[Patent Attorney]  
[Name of Patent Attorney] Nobuo Sekine

[APPOINTED PATENT ATTORNEY]  
[Identification Number] 100082898  
[Patent Attorney]  
[Name of Patent Attorney] Masaya Nishiyama

[INDICATION OF FEES TO BE PAID]  
[Registration Number for prepayment] 008268  
[Amount Fee] 16,000 yen

[LIST OF ARTICLES TO BE SUBMITTED]  
[Name of Article] Scope of Claims for Patent 1  
[Name of Article] Specification 1  
[Name of Article] Drawing 1  
[Name of Article] Abstract 1  
[General Authorization Number] 0306635

[NAME OF DOCUMENT] CLAIMS

[CLAIM 1]

5 An exhaust gas purifying catalyst comprising a metal oxide particle and rhodium supported thereon, wherein said metal oxide particle comprises a core part relatively rich in ceria and a surface layer relatively rich in zirconia.

[CLAIM 2]

10 The exhaust gas purifying catalyst according to claim 1, wherein said core part and said surface layer each comprises a plurality of primary particles.

[CLAIM 3]

15 The exhaust gas purifying catalyst according to claim 1 or 2, wherein the molar fraction of cerium is from 35 to 50 mol% based on the total molar number of cerium and zirconium in said metal oxide particle.

[CLAIM 4]

20 The exhaust gas purifying catalyst according to any one of claims 1 to 3, wherein the total molar fraction of cerium and zirconium is at least 85 mol% based on the total molar number of metals in said metal oxide particle.

[CLAIM 5]

25 The exhaust gas purifying catalyst according to any one of claims 1 to 4, wherein said metal oxide particle has an average particle diameter of less than 10  $\mu\text{m}$ .

[CLAIM 6]

30 The exhaust gas purifying catalyst according to any one of claims 1 to 5, wherein at least one element selected from the group consisting of alkaline earth metals and rare earths is added to said core part relatively rich in ceria.

[CLAIM 7]

35 The exhaust gas purifying catalyst according to any one of claims 1 to 6, wherein at least one element selected from the group consisting of alkaline earth metals and rare earths is added to said surface layer

relatively rich in zirconia.

[CLAIM 8]

A process for producing an exhaust gas purifying catalyst, comprising:

5        providing a sol containing at least a population of ceria colloid particles and a population of zirconia colloid particles differing in the isoelectric point with each other,

10        adjusting the pH of said sol to be closer to the isoelectric point of said population of ceria colloid particles than to the isoelectric point of said population of zirconia colloid particles, thereby aggregating said population of ceria colloid particles,

15        adjusting the pH of said sol to be closer to the isoelectric point of said population of zirconia colloid particles than to the isoelectric point of said population of ceria colloid particles, thereby aggregating said population of zirconia colloid particles onto said aggregated population of ceria colloid  
20        particles,

      drying and firing the obtained aggregate to obtain a metal oxide particle comprising a core part relatively rich in ceria and a surface layer relatively rich in zirconia, and

25        loading rhodium on the obtained metal oxide particle.

[NAME OF DOCUMENT] SPECIFICATION

[TITLE OF THE INVENTION] EXHAUST GAS PURIFYING CATALYST.  
AND PRODUCTION PROCESS THEREOF

[TECHNICAL FIELD]

5 [0001]

The present invention relates to an exhaust gas  
purifying catalyst and a production process thereof.

[RELATED ART]

[0002]

10 The exhaust gas from internal combustion engines  
such as automobile engines contains nitrogen oxide ( $\text{NO}_x$ ),  
carbon monoxide ( $\text{CO}$ ), hydrocarbon ( $\text{HC}$ ) and the like.  
These substances can be purified by an exhaust gas  
purifying catalyst capable of oxidizing  $\text{CO}$  and  $\text{HC}$  and at  
15 the same time, reducing  $\text{NO}_x$ . As for representative  
exhaust gas purifying catalysts, three-way catalysts  
where a noble metal such as platinum ( $\text{Pt}$ ), rhodium ( $\text{Rh}$ )  
and palladium ( $\text{Pd}$ ) is supported on a porous metal oxide  
support such as  $\gamma$ -alumina are known.

20 [0003]

The metal oxide support may be formed of various  
materials but, in order to obtain a high surface area,  
alumina ( $\text{Al}_2\text{O}_3$ ) has been heretofore generally used.  
However, in recent years, for accelerating purification  
25 of the exhaust gas by using the chemical properties of  
the support, it has been proposed to use various other  
materials such as ceria ( $\text{CeO}_2$ ), zirconia ( $\text{ZrO}_2$ ) and  
titanium ( $\text{TiO}_2$ ) in combination with, or not in combination  
with, alumina.

30 [0004]

For example, in order to alleviate the fluctuation  
of oxygen concentration in the exhaust gas and thereby  
enhance the exhaust gas purifying capacity of the three-  
way catalyst, a material having an oxygen storage  
35 capacity (OSC) of storing oxygen when the oxygen  
concentration in the exhaust gas is high, and releasing  
oxygen when the oxygen concentration in the exhaust gas

is low, is used as a support of the exhaust gas purifying catalyst. A representative material having OSC is ceria.

[0005]

5 In order to allow for efficient progress of  
oxidation of CO and HC and reduction of NO<sub>x</sub> by the  
activity of the three-way catalyst, the air-fuel ratio in  
the internal combustion engine must be a theoretical air-  
fuel ratio (stoichiometric air-fuel ratio). Therefore,  
10 the fluctuation of oxygen concentration in the exhaust  
gas is preferably alleviated to maintain the oxygen  
concentration in the vicinity of the theoretical air-fuel  
ratio, so that the three-way catalyst can exert its  
exhaust gas purifying ability. Furthermore, according to  
recent studies, it has been found that ceria not only has  
15 OSC but also, by virtue of its strong affinity for a  
noble metal, particularly platinum, can prevent particle  
growth (sintering) of the noble metal supported thereon.

[0006]

20 In this way, ceria has preferred properties for use  
in an exhaust gas purifying catalyst, but sometimes fails  
in satisfying heat resistance required in such usage.  
Accordingly, a method for elevating the heat resistance  
of ceria by forming a solid solution of ceria and  
zirconia has been developed.

25 [0007]

Patent Document 1 discloses an exhaust gas purifying  
catalyst obtained by loading a noble metal on a support  
comprising a core part mainly composed of ceria and a  
surface layer mainly composed of zirconia. According to  
30 this exhaust gas purifying catalyst of Patent Document 1,  
it is stated that OSC can be provided by ceria in the  
core part and ceria-zirconia solid solution at the  
interface between the core part and the surface layer,  
and heat resistance can be provided by zirconia in the  
35 surface layer.

[0008]

Also, use of zirconia as a catalyst support particle

has been conventionally known and particularly, it is known that when rhodium is supported on a zirconia particle, the ability of generating hydrogen by steam reforming is elevated as compared with the case of loading rhodium on an alumina particle (see, for example, Patent Document 2)

[0009]

[PATENT DOCUMENT 1] Japanese Unexamined Patent Publication (Kokai) No. 2003-277060

[PATENT DOCUMENT 2] Japanese Unexamined Patent Publication (Kokai) No. 2002-346386

[PROBLEMS TO BE SOLVED BY THE INVENTION]

[0010]

The present invention provides an exhaust gas purifying catalyst having both OSC provided by ceria and heat resistance attributable to zirconia in good combination, and furthermore, despite the presence of ceria, assuring good function provided by the combination of rhodium and zirconia.

[MEANS FOR SOLVING THE PROBLEMS]

[0011]

The exhaust gas purifying catalyst of the present invention is an exhaust gas purifying catalyst comprising a metal oxide particle and rhodium supported thereon, wherein the metal oxide particle comprises a core part relatively rich in ceria and a surface layer relatively rich in zirconia and, particularly, the core part and the surface layer each comprises a plurality of primary particles.

[0012]

According to the exhaust gas purifying catalyst of the present invention, a metal oxide particle comprising a core part relatively rich in ceria and a surface layer relatively rich in zirconia is used, so that OSC provided by ceria in the core part and high heat resistance attributable to zirconia in the surface layer can be achieved. Furthermore, excellent catalyst activity can

be achieved owing to the combination of zirconia in the surface layer and rhodium supported thereon.

[0013]

5       The term "relatively rich in" as used herein for the metal oxide comprising a core part and a surface layer is used with respect to the molar fraction based on the total molar number of metals in each of the core part and the surface layer. Accordingly, for example, the "core  
10       part relatively rich in ceria" means that the molar fraction of cerium (Ce) of ceria in the core part is higher than the molar fraction of cerium in the surface layer.

[0014]

15       In one embodiment of the exhaust gas purifying catalyst of the present invention, the molar fraction of cerium is from 35 to 50 mol%, particularly from 45 to 48 mol%, based on the total molar number of cerium and zirconium in the metal oxide particle.

[0015]

20       In another embodiment of the exhaust gas purifying catalyst of the present invention, the total molar fraction of cerium and zirconium may be at least 85 mol%, particularly at least 90 mol%, more particularly at least 95 mol%, based on the total molar number of metals in the  
25       metal oxide particle.

[0016]

30       According to these embodiments, OSC provided by ceria in the core part and high heat resistance attributable to zirconia in the surface layer can be satisfactorily achieved.

[0017]

35       In another embodiment of the exhaust gas purifying catalyst of the present invention, the metal oxide particle has an average particle diameter of less than 10  $\mu\text{m}$ , less than 5  $\mu\text{m}$ , less than 1  $\mu\text{m}$ , less than 500 nm, less than 200 nm, less than 100 nm or less than 50 nm.

[0018]

In another embodiment of the exhaust gas purifying catalyst of the present invention, at least one element selected from the group consisting of alkaline earth metals and rare earths, particularly yttrium, is added to the core part relatively rich in ceria.

[0019]

According to this embodiment, the heat resistance and the OSC of the core part relatively rich in ceria can be enhanced.

[0020]

In another embodiment of the exhaust gas purifying catalyst of the present invention, at least one element selected from the group consisting of alkaline earth metals and rare earths, particularly yttrium, is added to the surface layer relatively rich in zirconia.

[0021]

According to this embodiment, the oxygen conductivity of the surface layer is improved and therefore, the OSC provided by ceria in the core part can be satisfactorily utilized. Furthermore, according to this embodiment, heat resistance of the surface layer is improved.

[0022]

The production process of an exhaust gas purifying catalyst of the present invention comprises providing a sol containing at least a population of ceria colloid particles and a population of zirconia colloid particles differing in the isoelectric point with each other; adjusting the pH of the sol to be closer to the isoelectric point of the population of ceria colloid particles than to the isoelectric point of the population of zirconia colloid particles, thereby aggregating the population of ceria colloid particles; adjusting the pH of the sol to be closer to the isoelectric point of the population of zirconia colloid particles than to the isoelectric point of the population of ceria colloid particles, thereby aggregating the population of zirconia



colloid particles onto the population ceria colloid particles aggregated; drying and firing the obtained aggregate to obtain a metal oxide particle comprising a core part relatively rich in ceria and a surface layer relatively rich in zirconia; and loading rhodium on the obtained metal oxide particle.

[0023]

According to the process of the present invention, an exhaust gas purifying catalyst comprising a metal oxide particle and rhodium supported thereon can be obtained, wherein the metal oxide particle comprises a core part relatively rich in ceria and a surface layer relatively rich in zirconia, and the core part and the surface layer each comprises a plurality of primary particles.

[0024]

The metal oxide particle obtained can have a relatively small particle diameter, for example, an average particle diameter of less than 10  $\mu\text{m}$ , less than 5  $\mu\text{m}$ , less than 1  $\mu\text{m}$ , less than 500 nm, less than 200 nm, less than 100 nm or less than 50 nm. For example, when the sol used as a raw material has an average particle diameter of about 5 nm, the average particle diameter of the metal oxide particles produced by the process of the present invention can be 50 nm or less. With such a relatively small particle diameter, the surface layer is relatively thin, and the thin surface layer is useful for utilizing good OSC provided by ceria in the core part, despite the presence of the surface layer.

[0025]

The term "colloid particles" as used herein means particles which comprise a metal oxide or a metal bonded to oxygen dispersed in a liquid, particularly water, and which produces a metal oxide when the dispersion medium is removed and the residue is fired. The "colloid particles" are generally understood to have a diameter of 1 to 1,000 nm, particularly from 1 to 500 nm. For

example, a sol containing a population of colloid particles having a diameter of less than 100 nm or less than 50 nm is available.

[0026]

5       The term "sol" as used herein means a dispersion system wherein colloid particles are dispersed in a dispersion medium which is a liquid, and this is sometimes referred to as a colloid solution. The dispersion medium contained in the sol is generally  
10       water, but an organic dispersion medium such as alcohol and acetylacetone may be contained, if desired.

[0027]

#### BEST MODE FOR CARRYING OUT THE INVENTION

15       The present invention is described below by referring to Figs. 1 and 2. Figs. 1 and 2 each is a cross-sectional view of the catalyst of the present invention.

[0028]

20       As shown in Fig. 1, the exhaust gas purifying catalyst of the present invention comprises a core part 1 relatively rich in ceria and a surface layer 2 relatively rich in zirconia, in which rhodium 3 is supported on the surface layer 2. As shown in Fig. 2, the core part 1 and the surface layer 2 each may comprise a plurality of  
25       primary particles (1a, 2a).

[0029]

30       This metal oxide particle may have an average particle diameter of, for example, less than 10  $\mu\text{m}$ , less than 5  $\mu\text{m}$ , less than 1  $\mu\text{m}$ , less than 500 nm, less than 200 nm, less than 100 nm or less than 50 nm.

[0030]

35       The boundary between the core part 1 and the surface layer 2 may not be necessarily distinct and may appear as a portion where the composition is gradually changed. Furthermore, the boundary part between the core part 1 and the surface layer 2 may be a mixture, particularly a solid solution, of ceria and zirconia. In Fig. 1, the

surface layer 2 is shown as if it is continuous, but the surface layer may be discontinuous as shown in Fig. 2.

[0031]

5 In the case where the core part and the surface layer each comprises a plurality of primary particles and the metal oxide particle is formed from a sol, these primary particles correspond to the colloid particles in the sol, and a distinct boundary may or may not be present between respective primary particles.

10 [0032]

The surface layer or core part of the metal oxide particle of the present invention may contain a metal other than cerium (Ce) and zirconium (Zr), for example, a metal selected from the group consisting of alkaline earth metals and rare earth elements, particularly yttrium (Y). The metal oxide of alkaline earth metal or rare earth element, particularly yttrium, tends to provide excellent heat resistance to zirconia, ceria and/or ceria-zirconia solid solution.

20 [0033]

The exhaust gas purifying catalyst of the present invention may be used not only by shaping the catalyst itself, but also by coating it on a monolith substrate, for example, a ceramic honeycomb.

25 [0034]

The exhaust gas purifying catalyst of the present invention may be produced by any method but can be produced particularly by the process of the present invention.

30 [0035]

Respective steps in the process of the present invention are described below.

[0036]

<Provision of Sol mixture>

35 In the process of the present invention, a sol comprising at least a population of ceria colloid particles and a population of zirconia colloid particles

is provided, those populations differing, in isoelectric point, from each other.

[0037]

Specific examples of the sol include substances  
5 obtained by hydrolyzing and condensing an alkoxide, an acetylacetonate, an acetate or a nitrate of metal. Further, a sol such as zirconia sol and ceria sol is a known material and may also be available as a commercial product.

10 [0038]

The metal oxide sol generally available on the market has a pH distant from the isoelectric point of the colloid particles contained therein, so that the colloid particles contained can electrostatically repel each  
15 other to prevent aggregation. That is, a sol containing colloid particles having an isoelectric point on the alkali side is stabilized by acidifying the sol (acid-stabilized sol), and a sol containing colloid particles having an isoelectric point on the acidic side is  
20 stabilized by alkalifying the sol (alkali-stabilized sol).

[0039]

The isoelectric point of the colloid particles does not necessarily depend on a material itself constituting  
25 the particles, such as oxide, but can be arbitrarily set by the surface modification of colloid particles, particularly by the surface modification of colloid particles with an organic compound. Accordingly, the populations of ceria and zirconia colloid particles for  
30 use in the process of the present invention each may be arbitrarily selected to have appropriate pHs for the process of the present invention. For example, these populations of colloid particles can be selected to give a difference of 3 or more, particularly 4 or more, more  
35 particularly 5 or more, between the isoelectric points of the populations of colloid particles.

[0040]

The isoelectric point of a population of colloid particles, which must be known for the process of the present invention, may be determined by any method but can be measured, for example, by an electrophoretic light scattering method.

[0041]

The sol containing at least two kinds of colloid particles, which can be used in the process of the present invention, may be obtained by any method but in particular, the sol can be obtained by mixing different kinds of sols. The mixing ratio of populations of colloid particles can be arbitrarily determined depending on the desired properties of the metal oxide particle.

[0042]

In the process of the present invention, the element such as alkaline earth metal and rare earth, which are preferably contained in the metal oxide particle, can be contained in the sol not only as colloid particles but also as a metal salt such as nitrate.

[0043]

<Aggregation of Ceria Colloid particles>

In the process of the present invention, the pH of the sol is then adjusted to be closer to the isoelectric point of the population of ceria colloid particles than to the isoelectric point of the population of zirconia colloid particles, thereby aggregating the population of ceria colloid particles.

[0044]

As described above, the metal oxide sol generally available on the market has a pH different from the isoelectric point of a population of colloid particles contained, so that the colloid particles can electrostatically repel each other to prevent aggregation.

[0045]

Accordingly, when the pH of a sol containing a population of ceria colloid particles and a population of

zirconia colloid particles is changed to the vicinity of the isoelectric point of the population of ceria colloid particles, for example into the range of  $\pm 1.0$ , particularly  $\pm 0.5$ , of the isoelectric point of the population of ceria colloid particles, as in the present invention, the zeta potential of the population of ceria colloid particles becomes small and this allows for little generation of electrical repulsion between particles, whereby aggregation of the population of ceria colloid particles is accelerated. Here, the pH of the sol is relatively distant from the isoelectric point of the population of zirconia colloid particles and therefore, the population of zirconia colloid particles has a relatively large zeta potential and is prevented from aggregation.

[0046]

Incidentally, in aggregating the colloid particles, if the pH of the sol is changed to pass through the isoelectric point of the colloid particles intended to be aggregated, the zeta potential of the colloid particles becomes zero when the pH of the sol passes through the isoelectric point thereof, so that aggregation of this colloid particles can be unfailingly attained.

[0047]

The pH of the sol can be adjusted by adding any acid or alkali. Examples of the acid which can be used include mineral acids such as nitric acid and hydrochloric acid, and examples of the alkali which can be used include aqueous ammonia and sodium hydroxide. The pH of the sol can also be adjusted by merely mixing multiple species of sols.

[0048]

The pH of the sol can be adjusted by a method of adding an acid or an alkali to the sol while measuring the pH of the sol by a pH meter, or a method of predetermining the amount of acid or alkali necessary for the pH adjustment by using a previously sampled sol, and

adding the acid or alkali to the entire sol in the predetermined amount.

[0049]

<Aggregation of Zirconia Colloid particles>

5        In the process of the present invention, the pH of the sol is then adjusted to be closer to the isoelectric point of the population of zirconia colloid particles than to the isoelectric point of the population of ceria colloid particles, thereby aggregating the population of  
10       zirconia colloid particles onto the periphery of the population ceria colloid particles aggregated.

[0050]

15       When the pH of the sol containing the population ceria colloid particles aggregated is changed to the vicinity of the isoelectric point of the population of zirconia colloid particles, the zeta potential of the population of zirconia colloid particles becomes small and this allows for little generation of electrical repulsion between particles, whereby aggregation of the  
20       population of zirconia colloid particles is accelerated. In this stage, the pH of the sol is relatively different from the isoelectric point of the population of ceria colloid particles, so that the population of ceria  
25       colloid particles can be prevented from aggregation and the population of zirconia colloid particles can deposit onto the periphery of the population of ceria colloid particles aggregated.

[0051]

30       The pH of the sol can be adjusted in the same manner as in the above-described aggregation of ceria.

[0052]

<Drying and Firing of Aggregate>

35       The thus-obtained aggregate is dried and fired, whereby a metal oxide particle comprising a core part relatively rich in ceria and a surface layer relatively rich in zirconia, the core part and the surface layer each comprising a plurality of primary particles, can be

obtained.

[0053]

The removal and drying of dispersion medium from sol may be performed by any method at any temperature. For  
5 example, this can be achieved by placing the sol in an oven at 120°C. The raw material obtained by removing and drying the dispersion medium from the sol is fired, whereby the metal oxide particle can be obtained. The firing may be performed at a temperature generally  
10 employed for producing metal oxides, for example, at a temperature of 500 to 1,100°C.

[0054]

<Loading of Rhodium>

In the process of the present invention, finally,  
15 rhodium is loaded on the thus-obtained metal oxide particle.

[0055]

The rhodium can be loaded on the metal oxide particle by using any known method. More specifically,  
20 the metal oxide particle is impregnated with a solution containing a salt and/or a complex salt of rhodium, for example, an aqueous rhodium nitrate solution, dried and fired, whereby rhodium can be loaded. The amount of rhodium supported on the metal oxide particle may be from  
25 0.01 to 5 mass%, particularly from 0.1 to 2 mass%, based on the metal oxide particle.

[0056]

The present invention is described in greater detail below by referring to Examples, but the present invention  
30 is not limited thereto.

[0057]

<Examples>

In the following tests, the pH of the sol was measured by using a pH meter wherein the pH meter  
35 electrode was directly dipped in the sol.

[0058]

<Example 1>



In this Example, a metal oxide particle comprising a core part relatively rich in ceria and a surface layer relatively rich in zirconia ( $\text{CeO}_2:\text{ZrO}_2:\text{Y}_2\text{O}_3=45:52:3$  (by mol)) is obtained, and rhodium is supported thereon.

5 [0059]

An alkali-stabilized ceria sol (isoelectric point: pH 3.5), an acid-stabilized zirconia sol (isoelectric point: pH 8.5) and an yttria sol were mixed to give the above-described molar ratio, thereby rendering the sol mixture acidic and aggregating ceria. Thereafter, an aqueous 5M ammonia ( $\text{NH}_3$ ) solution was added dropwise with stirring to adjust the pH to 11, thereby aggregating zirconia. The resulting solution was dried at  $120^\circ\text{C}$  for 24 hours, and the dried product was fired at  $700^\circ\text{C}$  for 5 hours to obtain metal oxide particles.

[0060]

The thus-obtained metal oxide particles were dispersed in distilled water which was in an amount of 6-fold weight, a rhodium nitrate solution was added thereto so that rhodium is in an amount of 0.5 wt% based on the metal oxide particle, and the resulting solution was stirred for 1 hour. Thereafter, the water content was removed by drying at  $120^\circ\text{C}$ , the residue was fired at  $500^\circ\text{C}$  for 2 hours. The obtained catalyst was shaped into a 1 mm-square pellet and used for the evaluation of performance.

[0061]

<Example 2>

In this Example, a catalyst was obtained in the same manner as in Example 1 except that the molar ratio of components in the metal oxide particle was changed to  $\text{CeO}_2:\text{ZrO}_2:\text{Y}_2\text{O}_3=48:49:3$ .

[0062]

<Example 3>

In this Example, a catalyst was obtained in the same manner as in Example 1 except that the molar ratio of

components in the metal oxide particle was changed to  
 $\text{CeO}_2:\text{ZrO}_2:\text{Y}_2\text{O}_3=25:72:3$ .

[0063]

<Example 4>

5 In this Example, a catalyst was obtained in the same  
manner as in Example 1 except that the molar ratio of  
components in the metal oxide particle was changed to  
 $\text{CeO}_2:\text{ZrO}_2:\text{Y}_2\text{O}_3=50:47:3$ .

[0064]

10 <Example 5>

In this Example, a catalyst was obtained in the same  
manner as in Example 1 except that the molar ratio of  
components in the metal oxide particle was changed to  
 $\text{CeO}_2:\text{ZrO}_2:\text{Y}_2\text{O}_3=55:42:3$ .

15 [0065]

<Example 6>

In this Example, a catalyst was obtained in the same  
manner as in Example 1 except that the molar ratio of  
components in the metal oxide particle was changed to  
20  $\text{CeO}_2:\text{ZrO}_2:\text{Y}_2\text{O}_3=75:22:3$ .

[0066]

<Comparative Example 1>

In this Example, a catalyst was obtained in the same  
manner as in Example 1 except that a zirconia particle  
25 was used as the metal oxide particle.

[0067]

<Comparative Example 2>

In this Example, a catalyst was obtained in the same  
manner as in Example 1 except that a ceria particle was  
30 used as the metal oxide particle.

[0068]

<Comparative Example 3>

In this Example, a metal oxide particle  
( $\text{CeO}_2:\text{ZrO}_2:\text{Y}_2\text{O}_3=45:52:3$  (by mol)) which is the same as in  
35 Example 1 is obtained and platinum is loaded thereon.

[0069]

Metal oxide particles obtained in the same manner as

in Example 1 were dispersed in distilled water which was in an amount of 6-fold weight, a dinitrodiammine platinum solution was added thereto so that platinum is in an amount of 0.5 wt% based on the metal oxide particles, and the resulting solution was stirred for 1 hour. Thereafter, the water content was removed by drying at 120°C, the residue was fired at 500°C for 2 hours, and the obtained catalyst was shaped into a 1 mm-square pellet and used for the evaluation of performance.

10 [0070]

<Evaluation of Catalyst Performance>

The pellet-like catalyst obtained in Examples 1 to 6 and Comparative Examples 1 to 3 were subjected rich and lean gases each having a composition shown in Table 1. The gases were passed therethrough at 1,000°C for 5 hours and the gases were switched over every one minute. Thereafter, rich and lean gases each having a composition shown in Table 1 were passed through the catalyst and the gases were switched over at 1 Hz while elevating the gas temperature, thereby determining the temperature where the HC (hydrocarbon) purification percentage reached 50% (HC-T50). Also, Co (2%) and O<sub>2</sub> (1%) were passed, with switching over therebetween every one minute, and the OSC (oxygen storage capacity) (O<sub>2</sub> mmol/support-g) was calculated from the amount of CO<sub>2</sub> generated during passing of CO. Furthermore, the specific surface area (SSA) was measured by using a BET one-point method. The results obtained are shown in Table 2 and Figs. 3 to 5.

[0071]

Table 1: Composition of Gas

	N <sub>2</sub> (%)	CO <sub>2</sub> (%)	NO (ppm)	CO (%)	C <sub>3</sub> H <sub>6</sub> (ppmC)	H <sub>2</sub> (%)	O <sub>2</sub> (%)	H <sub>2</sub> O (%)
Rich Gas	balance	10	2200	2.80	2500	0.27	0.77	10
Lean Gas	balance	10	2200	0.81	2500	0	1.7	10

[0072]

Table 2: Results

	Amount of CeO <sub>2</sub> (mol%)	Noble Metal	SSA (m <sup>2</sup> /g)	HC-T50 (°C)	OSC*
Ex. 1	45	Rh (0.5 wt%)	26	273	0.32
Ex. 2	48	"	24	275	0.32
Ex. 3	25	"	27	283	0.02
Ex. 4	50	"	24	301	0.28
Ex. 5	55	"	24	304	0.28
Ex. 6	75	"	12	348	0.06
Comp. Ex. 1	0	"	28	281	0.00
Comp. Ex. 2	100	"	9	354	0.05
Comp. Ex. 3	45	Pt (0.5 wt%)	26	350	0.30

5 \* Unit of OSC : O<sub>2</sub> mmol/support-g

[0073]

As is apparent from Table 2 and Figs. 3 and 4, the catalysts of Examples 1 to 6 maintain a relatively large specific surface area while providing OSC. Among these  
10 Examples 1 to 6, the catalysts of Examples 1 and 2 having a ceria content of 45 mol% and 48 mol% realize both high OSC and a large surface area, and thereby exhibit particularly low HC-T50 temperature, that is, excellent low-temperature catalyst activity (see, Fig. 5).

15 [0074]

As described above, Comparative Example 3 (shown by white circle in Figs. 3 to 5) is an exhaust gas purifying catalyst obtained by loading platinum on the same metal oxide particle as in Example 1 which exhibits a most  
20 excellent HC-T50 temperature among Examples 1 to 6. However, in all of Examples 1 to 6 of the present invention, the HC-T50 temperature is lower than that of Comparative Example 3. This reveals that it is very useful to load rhodium on a metal oxide particle  
25 comprising a core part relatively rich in ceria and a

surface layer relatively rich in zirconia.

[BRIEF DESCRIPTIONS OF THE DRAWINGS]

[0075]

5 [Fig. 1] Fig. 1 is a cross-sectional view showing one embodiment of the catalyst of the present invention.

[Fig. 2] Fig. 2 is a cross-sectional view showing the another embodiment of the catalyst the present invention.

10 [Fig. 3] Fig. 3 shows a relationship between the  $\text{CeO}_2$  contents of catalysts and the OSC of supports in Examples and Comparative Examples.

[Fig. 4] Fig. 4 shows a relationship between the  $\text{CeO}_2$  contents of catalysts and the specific surface areas of supports in Examples and Comparative Examples.

15 [Fig. 5] Fig. 5 shows the relationship between the  $\text{CeO}_2$  contents of catalysts and the HC-T50 temperatures in Examples and Comparative Examples.


[BRIEF DESCRIPTIONS OF SYMBOLS]

- 1 Core part
- 20 1a Primary particle constituting core part
- 2 Surface layer
- 2a Primary particle constituting surface layer

【書類名】図面 [NAME OF DOCUMENT] DRAWINGS


【図 1】

[FIG. 1]

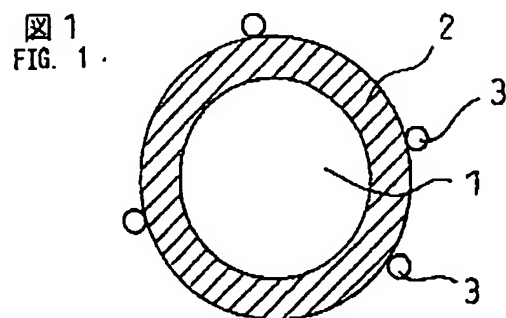

【図 2】

[FIG. 2]

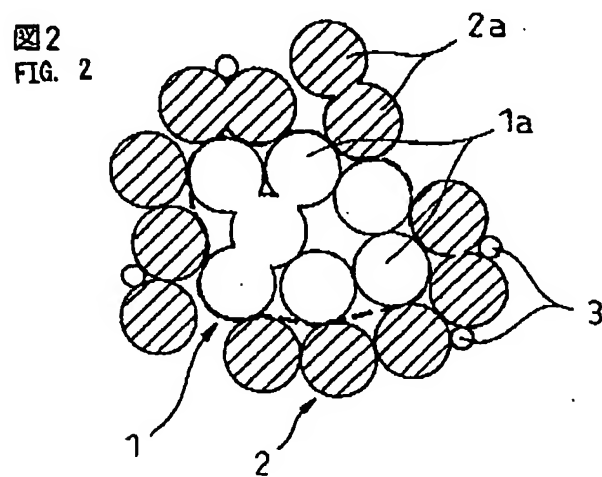


【図 3】

[FIG. 3]

図3 FIG. 3

CeO<sub>2</sub> CONTENTS VS. OSC OF SUPPORTS

CeO<sub>2</sub>含有量と担体のOSC能

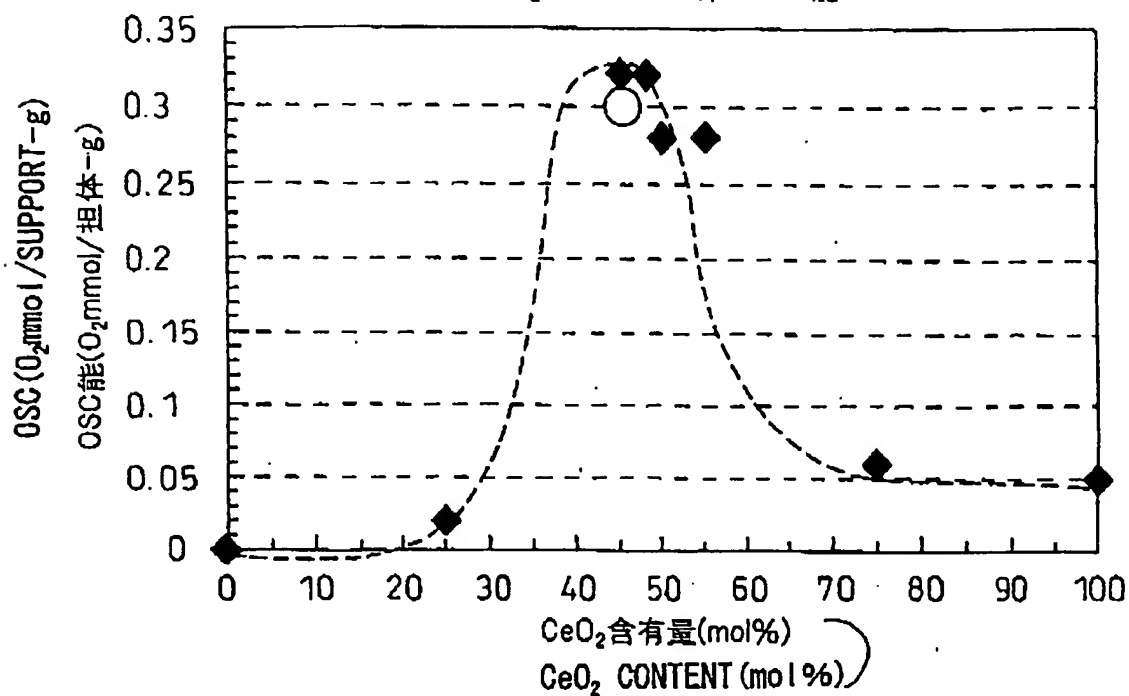


【図 4】

[FIG. 4]

図4 FIG. 4

CeO<sub>2</sub> CONTENTS VS. SPECIFIC SURFACE AREA OF SUPPORTS

CeO<sub>2</sub>含有量と担体の比表面積

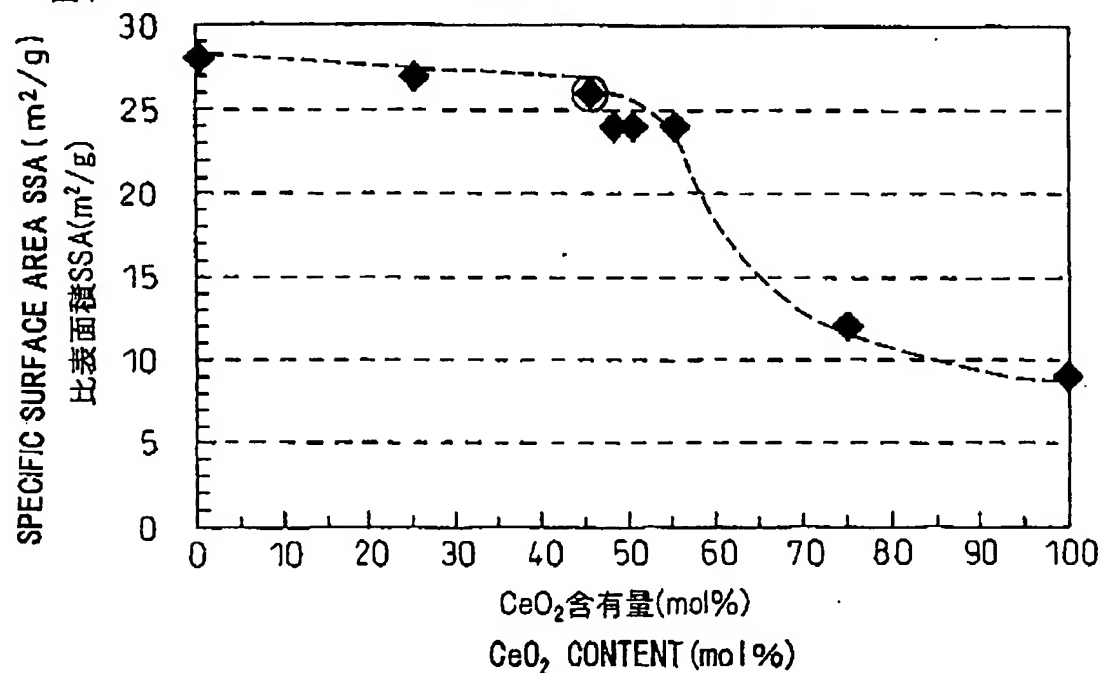


[図 5]  
[FIG. 5]

$\text{CeO}_2$  CONTENTS VS. CATALYST PERFORMANCE

図5 FIG. 5

$\text{CeO}_2$ 含有量と触媒性能

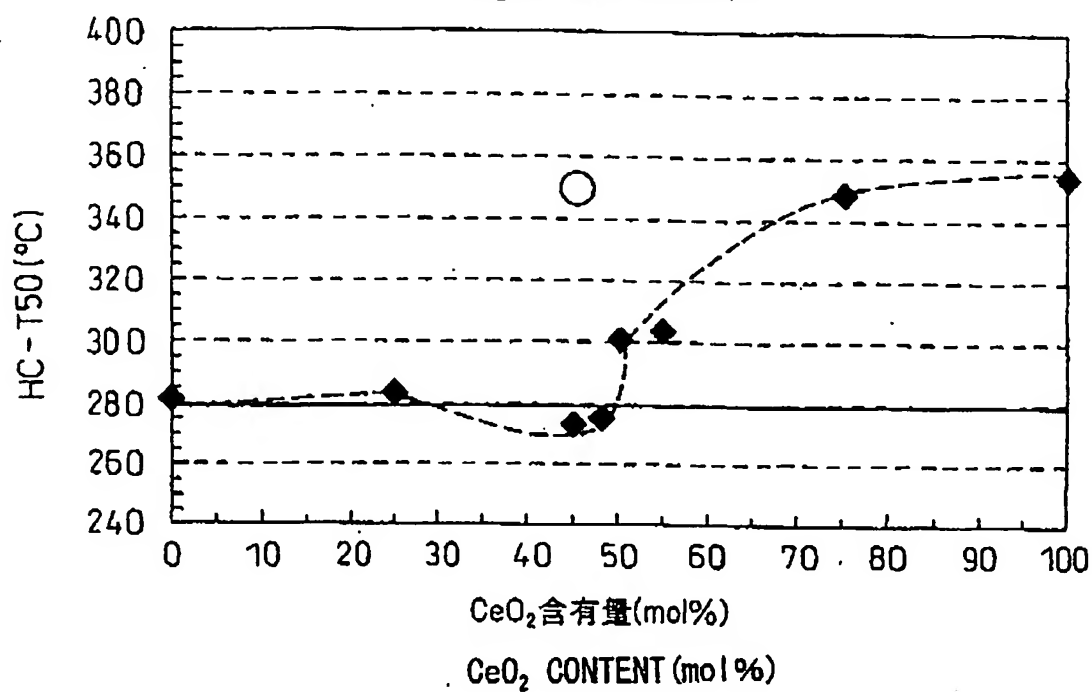



[NAME OF DOCUMENT] ABSTRACT

[ABSTRACT]

[SUBJECT] The present invention provides an exhaust gas purifying catalyst and a production process thereof.

5 [MEANS FOR SOLVING THE PROBLEM] An exhaust gas purifying catalyst of the present invention comprises a metal oxide particle (1, 2) and rhodium (3) supported thereon, the metal oxide particle (1, 2) comprising a  
10 core part (1) relatively rich in ceria and a surface layer (2) relatively rich in zirconia.

[REPRESENTATIVE DRAWING] FIG. 1